




ANNEX:

Amendments of provisions of the Code for Wind Powered Generating Stations

Article 4.6.3:

Currently: *Also during the voltage dip, the reduction in active power produced by the WPGS shall be at least 90% of its maximum available active power as quickly as the technology allows, and in any event within 1 second of the voltage at the connection point recovering to the normal operating range.*

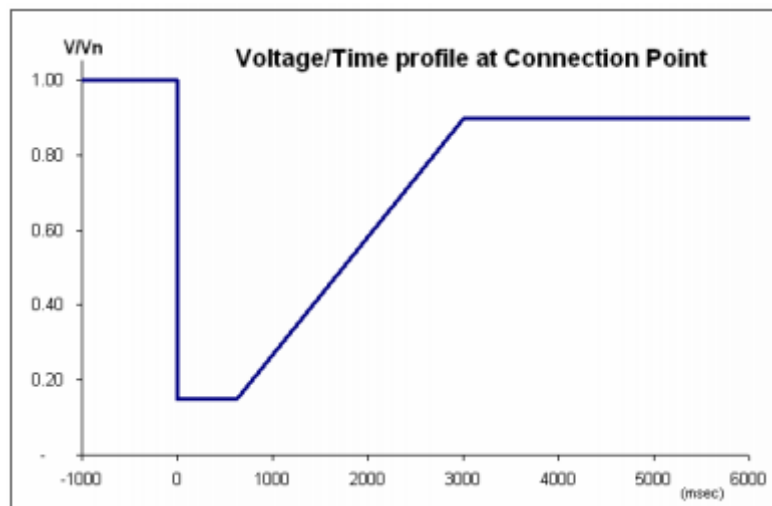

Proposal:

